

P.C.B LAYOUT

Features:

- * Available in 20 through 84 Circuits
- * Material: PBT UL94V-0
- * Pin Material: Brass/Gold-Plated





Ordering information:

YY-4800-XX R X L
1 2 3 4

- 1 No. of Circuits 10~64
- 2 R: Right Angle
- 3 Plated
T=Tin G=Gold
- 4 Type
L=Long Ear

Circuits	Dimension mm		
	A	B	C
2X5	10.16	32.00	21.84
2X7	15.24	37.08	26.92
2X8	17.78	39.62	29.46
2X10	22.86	44.70	34.54
2X12	27.94	49.78	39.62
2X13	30.48	52.32	42.16
2X15	35.56	57.40	47.24
2X17	40.64	62.48	52.32
2X20	48.26	70.10	59.94
2X25	60.96	82.80	72.64
2X30	73.66	95.50	85.34
2X34	78.74	100.58	90.42

DITION	DATE	MODIFY	DRAW BY	Art Scrth	VIEW: 	TOLERANCE		2.54(.100")mm Eject Latch Header		Approved by KINSWOOD ELECTRONICS CORP.
	A0	2004.08.06	DRAWING	Jeff		.0	±0.30	PART NO: YY-4800-XXRXL		
A1	2006.03.16	CHANGE	APPROVAL	Jessica	.00	±0.20	DWG NO: B2545RL048		REV. A1	
					UNIT: mm	.000				

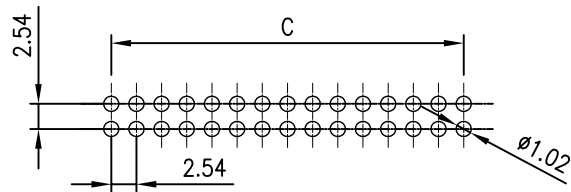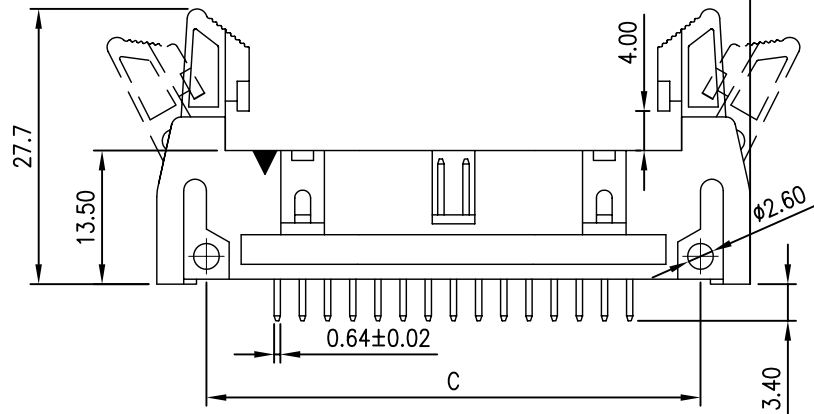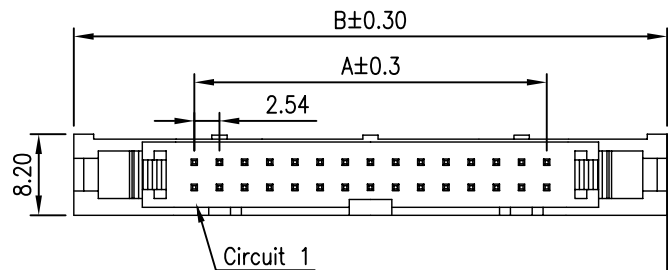

P.C.B LAYOUT

Features:

- * Available in 20 through 84 Circuits
- * Material: PBT UL94V-0
- * Pin Material: Brass/Gold-Plated


Ordering information:

YY-4800-XX S X S
1 2 3 4

- 1 No. of Circuits 10~64
- 2 S: Straight
- 3 Plated
T=Tin G=Gold
- 4 Type
S=Short Ear

Circuits	Dimension mm		
	A	B	C
2X5	10.16	32.00	21.84
2X7	15.24	37.08	26.92
2X8	17.78	39.62	29.46
2X10	22.86	44.70	34.54
2X12	27.94	49.78	39.62
2X13	30.48	52.32	42.16
2X15	35.56	57.40	47.24
2X17	40.64	62.48	52.32
2X20	48.26	70.10	59.94
2X25	60.96	82.80	72.64
2X30	73.66	95.50	85.34
2X34	78.74	100.58	90.42

DITION	DATE	MODIFY	DRAW BY	Art Scrth	VIEW: 	TOLERANCE		2.54(.100")mm Eject Latch Header		Approved by KINSWOOD ELECTRONICS CORP.
	A0	2004.08.06	DRAWING	AUDITING		Jeff	.0	±0.30	PART NO: YY-4800-XXSXS	
A1	2006.03.16	CHANGE	APPROVAL	Jessica	UNIT: mm	.00	±0.20	DWG NO: B2545SS048	REV. A1	

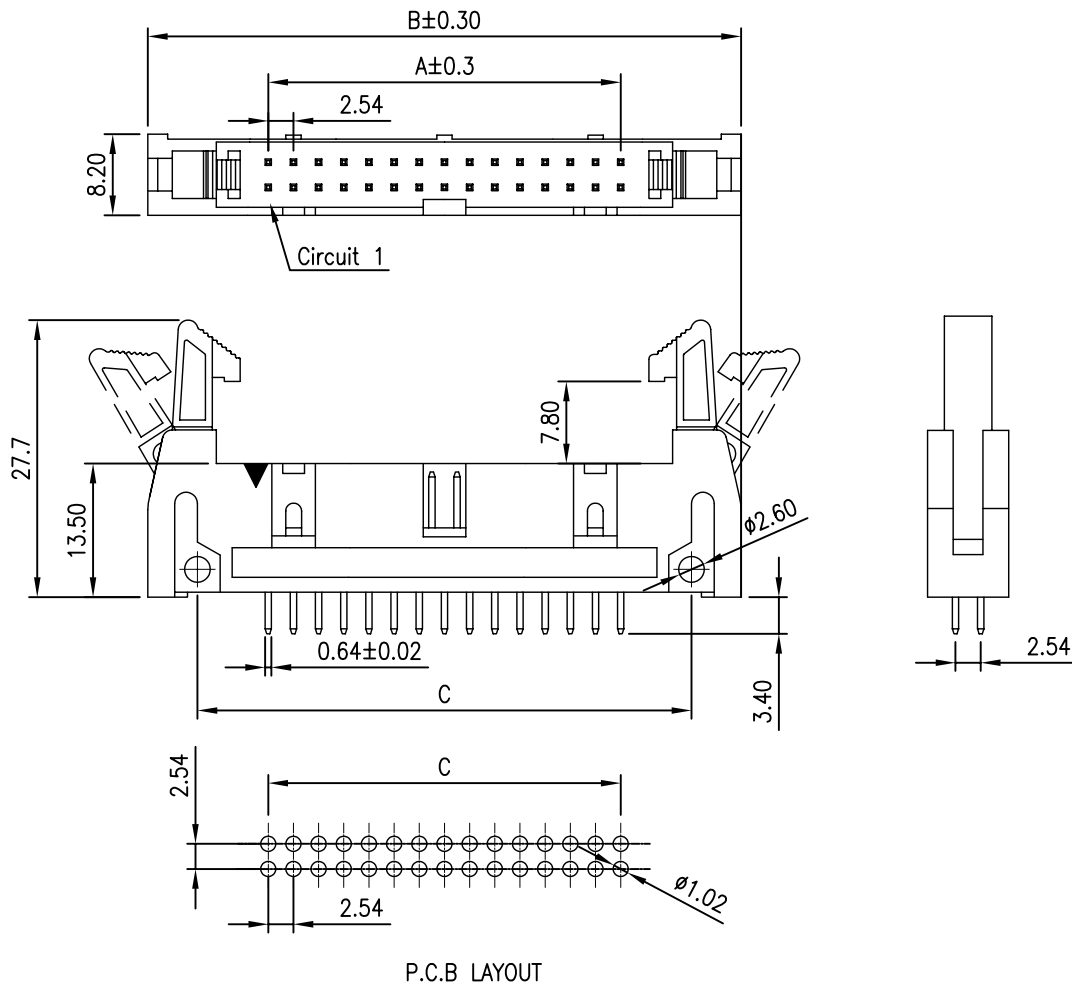

Features:

- * Available in 20 through 84 Circuits
- * Material: PBT UL94V-0
- * Pin Material: Brass/Gold-Plated





Ordering information:

YY-4800-XX S X L
1 2 3 4

- 1 No. of Circuits 10~64
- 2 S: Straight
- 3 Plated
 T=Tin G=Gold
- 4 Type
 L=Long Ear

Circuits	Dimension mm		
	A	B	C
2X5	10.16	32.00	21.84
2X7	15.24	37.08	26.92
2X8	17.78	39.62	29.46
2X10	22.86	44.70	34.54
2X12	27.94	49.78	39.62
2X13	30.48	52.32	42.16
2X15	35.56	57.40	47.24
2X17	40.64	62.48	52.32
2X20	48.26	70.10	59.94
2X25	60.96	82.80	72.64
2X30	73.66	95.50	85.34
2X34	78.74	100.58	90.42

DITION	DATE	MODIFY	DRAW BY	Art Scrth	VIEW: 	TOLERANCE		2.54(.100")mm Eject Latch Header		Approved by KINSWOOD ELECTRONICS CORP.
	A0	2004.08.06	DRAWING	Jeff		.0	±0.30	PART NO: YY-4800-XXSXL		
A1	2006.03.16	CHANGE		Jessica	.00	±0.20	DWG NO: B2545SL048			
			APPROVAL		UNIT: mm	.000		REV. A1		

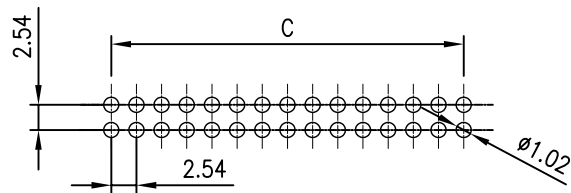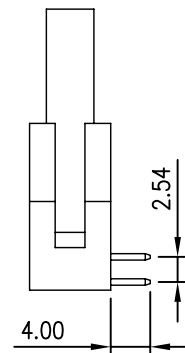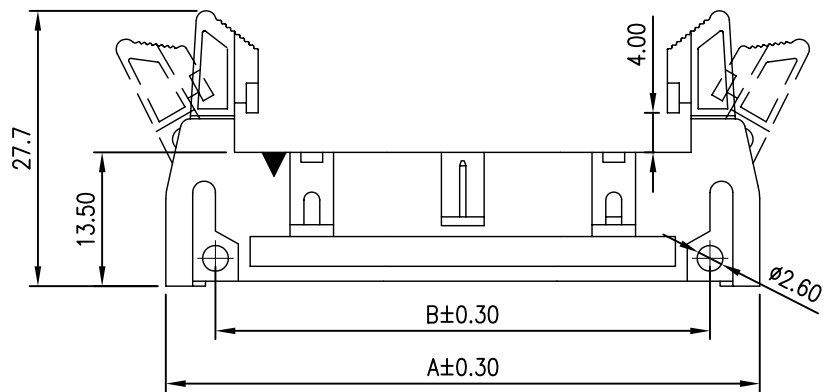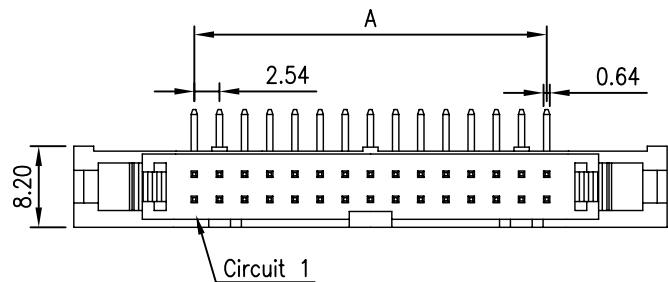

P.C.B LAYOUT

Features:

- * Available in 20 through 84 Circuits
- * Material: PBT + 15% GF UL94V-0
- * Pin Material: Brass/Gold-Plated

Ordering information:

YY-4800-XX R X S
1 2 3 4

- 1 No. of Circuits 10~64
- 2 R: Right Angle
- 3 Plated
 T=Tin G=Gold
- 4 Type
 S=Short Ear

Circuits	Dimension mm		
	A	B	C
2X5	10.16	32.00	21.84
2X7	15.24	37.08	26.92
2X8	17.78	39.62	29.46
2X10	22.86	44.70	34.54
2X12	27.94	49.78	39.62
2X13	30.48	52.32	42.16
2X15	35.56	57.40	47.24
2X17	40.64	62.48	52.32
2X20	48.26	70.10	59.94
2X25	60.96	82.80	72.64
2X30	73.66	95.50	85.34
2X34	78.74	100.58	90.42

DITON	DATE	MODIFY	DRAW BY	Art Scrth	VIEW: 	TOLERANCE		2.54(.100")mm Eject Latch Header	
	A0	2004.08.06	DRAWING	Jeff		.0	±0.30	PART NO: YY-4800-XXRXS	
A1	2006.03.16	CHANGE	APPROVAL	Jessica	UNIT: mm	.00	±0.20	DWG NO: B2545RS048	
						.000		REV. A1	

Approved by
KINSWOOD ELECTRONICS CORP.