

## MINI TERMINAL BLOCKS

**ITEM NO. GGB-20**

**PITCH 9.5mm (0.374in) RATING: 15A 300VAC**



### SPECIFICATIONS

**WIRE RANGE:** 14 TO 22 AWG

**BODY MATERIAL:** THERMOPLASTIC (UL94V-0)BLACK

**TERMINALS:** BRASS TIN/GOLD PLATED


**SCREWS:** STEEL NICKAL PLATED

**INSULATION WITHSTANDS:** VOLTAGE AC 2000V/MIN


**INSULATION RESISTANCE:** 500M $\Omega$  OR MORE AT DC 500V

**APPROVALS:** 


GGB-20-01

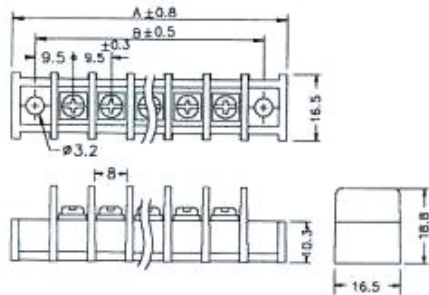


GGB-20-02

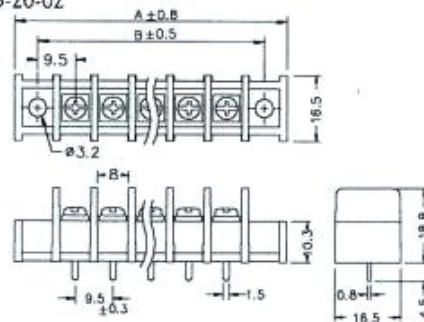


GGB-20-03

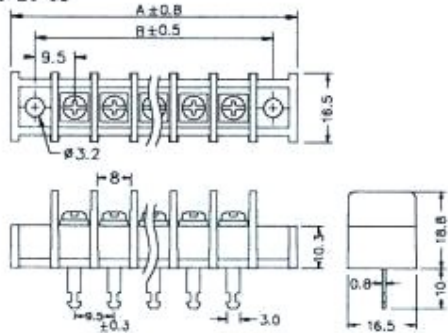


GGB-20-04

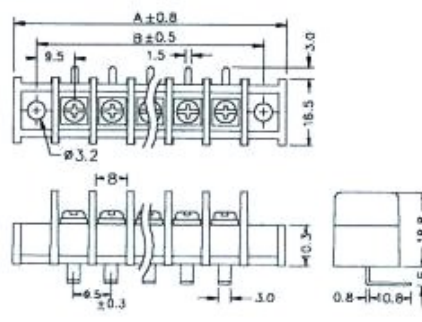


GGB-20-05

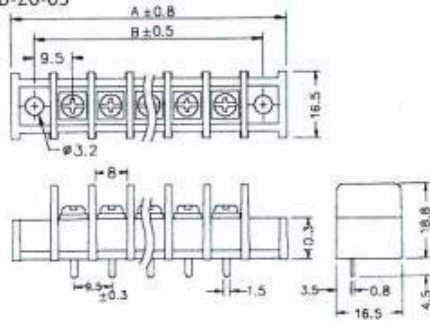

GGB-20-06

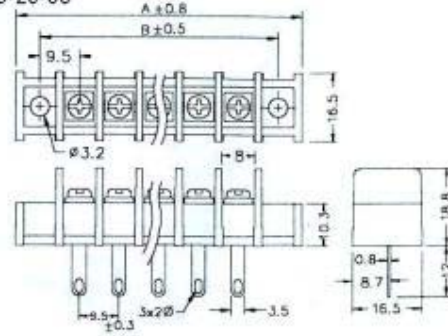

GGB-20-07

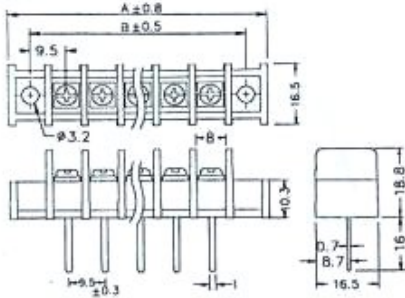

**DIMENSION: mm to inch**

POLE	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
A±0.8	40 (1.574)	49.5 (1.948)	59 (2.323)	68.5 (2.697)	78 (3.071)	87.5 (3.445)	97 (3.819)	106.5 (4.193)	116 (4.567)	125.5 (4.941)	135 (5.315)	144.5 (5.689)	154 (6.063)	163.5 (6.437)	173 (6.811)	182.5 (7.185)
B±0.5	28.5 (1.122)	38 (1.496)	47.5 (1.870)	57 (2.244)	66.5 (2.618)	76 (2.992)	85.5 (3.366)	95 (3.740)	104.5 (4.114)	114 (4.488)	123.5 (4.862)	133 (5.236)	142.5 (5.610)	152 (5.984)	161.5 (6.358)	171 (6.732)

POLE	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
A±0.8	192 (7.560)	201.5 (7.935)	211 (8.307)	220.5 (8.681)	230 (9.055)	239.5 (9.429)	249 (9.803)	258.5 (10.177)	268 (10.551)	277.5 (10.925)	287 (11.299)	296.5 (11.673)	306 (12.047)	315.5 (12.421)	325 (12.795)
B±0.5	180.5 (7.106)	190 (7.480)	199.5 (7.854)	209 (8.228)	218.5 (8.602)	228 (8.976)	237.5 (9.350)	247 (9.724)	256.5 (10.098)	266 (10.472)	275.5 (10.846)	285 (11.220)	294.5 (11.594)	304 (11.968)	313.5 (12.342)

**NUMBER OF POLE 02~32**

**NOTE: WITH MOUNT HOLE STANDARD (TO REDUCE 2 POLES FOR W/O MOUNT HOLE)**