

## MINI TERMINAL BLOCKS

**ITEM NO. GGB-210**

**PITCH 8.25mm(0.324in)**

**RATING: 15A 300VAC**



### SPECIFICATIONS

**WIRE RANGE:** 14 TO 22 AWG

**BODY MATERIAL:**  
THERMOPLASTIC (UL94V-0)BLACK

**TERMINALS:** BRASS  
TIN/GOLD PLATED


**SCREWS:** STEEL NICKEL PLATED

**INSULATION WITHSTANDS:**  
VOLTAGE AC 2000V/MIN


**INSULATION RESISTANCE:**  
500MΩ OR MORE AT DC 500V

**APPROVALS:** 


GGB-210-01

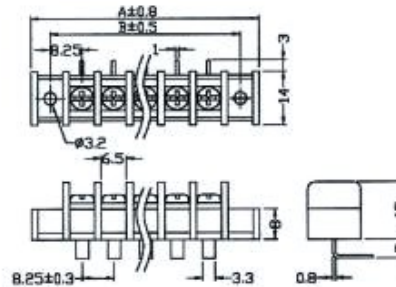


GGB-210-02

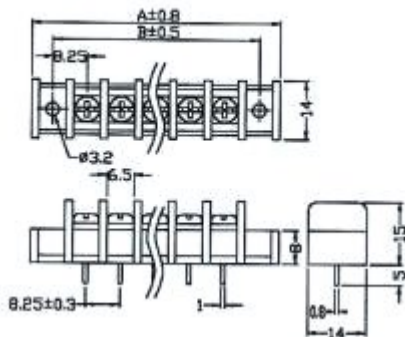


GGB-210-03

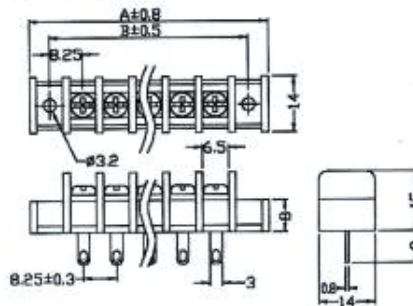

GGB-210-04

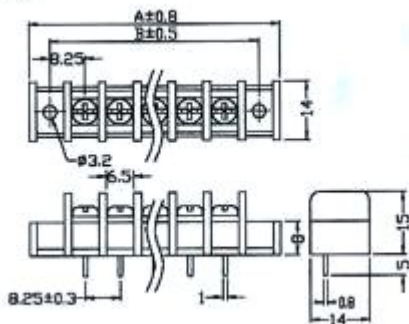

GGB-210-05

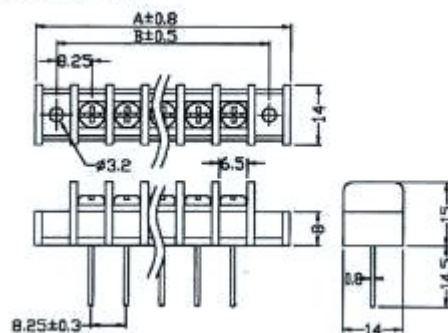

DIMENSION: mm to inch

POLE	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
A±0.5	34.2 (1.348)	42.4 (1.669)	50.7 (1.998)	58.9 (2.319)	67.2 (2.646)	75.4 (2.969)	83.7 (3.292)	91.9 (3.618)	100.2 (3.945)	108.4 (4.268)	116.7 (4.594)	124.9 (4.917)	133.2 (5.244)	141.4 (5.567)	150.7 (5.935)	157.9 (6.217)
B±0.5	24.75 (0.974)	33 (1.299)	41.25 (1.624)	49.5 (1.949)	57.75 (2.273)	66 (2.598)	74.25 (2.923)	82.5 (3.248)	90.75 (3.573)	99 (3.898)	107.25 (4.222)	115.5 (4.547)	123.75 (4.872)	132 (5.197)	140.25 (5.522)	148.5 (5.846)

POLE	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
A±0.5	165.7 (6.523)	174.4 (6.866)	182.7 (7.193)	190.9 (7.518)	199.2 (7.843)	207.4 (8.165)	215.7 (8.492)	223.9 (8.815)	232.2 (9.142)	240.4 (9.465)	248.7 (9.792)	256.9 (10.118)	265.2 (10.443)	273.4 (10.768)	281.7 (11.093)
B±0.5	156.25 (6.152)	165 (6.496)	173.25 (6.821)	181.5 (7.145)	189.75 (7.470)	198 (7.795)	206.25 (8.120)	214.5 (8.445)	222.75 (8.770)	231 (9.094)	239.25 (9.419)	247.5 (9.744)	255.75 (10.069)	264 (10.394)	272.25 (10.718)

NUMBER OF POLE 02~32

NOTE: WITH MOUNT HOLE STANDARD (TO REDUCE 2 POLES FOR W/O MOUNT HOLE)