

## TERMINAL BLOCKS

APPROVALS: 

GGE-10  
PITCH: 9.5mm RATING: 10A 300V




NUMBER OF POLE: 02-28P

GGE-10



NUMBER OF POLE: 02-28P

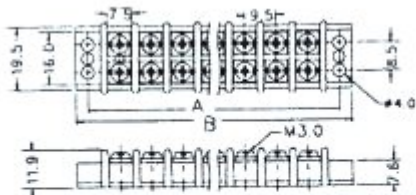

P 數	1	2	3	4	5	6	7	8	9	10	11	12	13	14
A	19	28.5	38	47.5	57	64.5	76	85.5	95	104.5	114	123.5	133	142.5
B	26.5	36	45.5	55	64.5	74	83.5	93	102.5	112	121.5	131	140.5	150

P 數	15	16	17	18	19	20	21	22	23	24	25	26	27	28
A	152	161.5	171	180.5	190	199.5	209	218.5	228	237.5	247	256.5	266	275.5
B	159.5	169	178.5	188	197.5	207	216.5	226	235.5	245	254.5	264	273.5	283

## SPECIFICATIONS

**WIRE RANGE:** 12 TO 18 AWG

**BODY MATERIAL:**

THERMOPLASTIC (UL94V-0)

**TERMINALS:** BRASS TIN PLATED

**SCREWS:** STEEL NICKEL PLATED

**TEMPERATURE RATING:**

40 °C TO 100 °C

**INSULATION WITHSTANDS:**

VOLTAGE AC 2000V/MIN

**INSULATION RESISTANCE:**

1000MΩ OR MORE AT DC