

TERMINAL BLOCKS

APPROVALS: 

GGE-10Y
PITCH:9, 5mm RATING:10A 300V




NUMBER OF POLE:02-28P

GGE-10Y



NUMBER OF POLE:02-28P

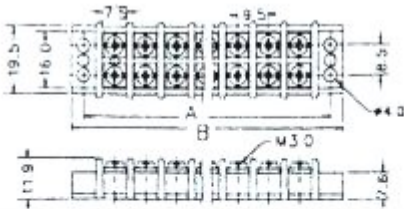

P數	1	2	3	4	5	6	7	8	9	10	11	12	13	14
A	19	28.5	38	47.5	57	64.5	76	85.5	95	104.5	114	123.5	133	142.5
B	26.5	36	45.5	55	64.5	74	83.5	93	102.5	112	121.5	131	140.5	150

P數	15	16	17	18	19	20	21	22	23	24	25	26	27	28
A	152	161.5	171	180.5	190	199.5	209	218.5	228	237.5	247	256.5	266	275.5
B	159.5	169	178.5	188	197.5	207	216.5	226	235.5	245	254.5	264	273.5	283

SPECIFICATIONS

WIRE RANGE: 12 TO 18 AWG

BODY MATERIAL:
THERMOPLASTIC (UL94V-0)

TERMINALS: BRASS TIN PLATED

SCREWS: STEEL NICKEL PLATED

TEMPERATURE RATING:
40°C TO 100°C

INSULATION WITHSTANDS:
VOLTAGE AC 2000V/MIN

INSULATION RESISTANCE:
1000MΩ OR MORE AT DC