


TERMINAL BLOCKS

APPROVALS: 

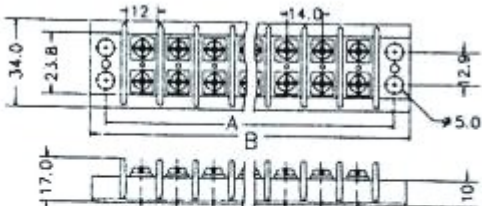

| P 数 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
|-----|----|----|----|----|----|-----|-----|-----|-----|-----|-----|-----|
| A | 28 | 42 | 56 | 70 | 84 | 98 | 112 | 126 | 140 | 154 | 168 | 182 |
| B | 38 | 52 | 66 | 80 | 94 | 108 | 122 | 136 | 150 | 164 | 178 | 192 |

| P 数 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| A | 196 | 210 | 224 | 238 | 252 | 266 | 280 | 294 | 308 | 322 | 336 | 350 |
| B | 206 | 220 | 234 | 248 | 262 | 276 | 290 | 304 | 318 | 332 | 346 | 360 |

SPECIFICATIONS

WIRE RANGE: 12 TO 18 AWG

BODY MATERIAL:
THERMOPLASTIC (UL94V-0)

TERMINALS: BRASS TIN PLATED

SCREWS: STEEL NICKEL PLATED

TEMPERATURE RATING:
-40°C TO 120°C

INSULATION WITHSTANDS:
VOLTAGE AC 2000V/MIN

INSULATION RESISTANCE:
1000MΩ OR MORE AT DC